

U.S. DEPARTMENT OF COMMERCE
PATENT AND TRADEMARK OFFICE

**PATENT APPLICATION
TRANSMITTAL LETTER**

ATTORNEY DOCKET NO.:
2565/47

Address to:
Assistant Commissioner for Patents
Washington D.C. 20231
Box Patent Application

Transmitted herewith for filing is the patent application of

Inventor(s) **Rainer DÖNIG, Joachim DÖPPER and Wolfgang SCHULZ**

For : **DIALYSIS MACHINE WITH A DEVICE FOR PREPARING
DIALYSIS SOLUTIONS**


Enclosed are:

1. 7 sheets of specification, 3 sheets of claims, and 1 sheet of abstract.
2. 2 sheet(s) of drawings.
3. A certified copy of application no. 198 14 687.6 on which the claim to priority is based filed April 1, 1998 in the Federal Republic of Germany.
4. The filing fee has been calculated as shown below:

	NUMBER FILED	NUMBER EXTRA*	RATE (\$)	FEE (\$)
BASIC FEE				760.00
TOTAL CLAIMS	19 - 20 =	0	18.00	0.00
INDEPENDENT CLAIMS	3 - 3 =	0	78.00	0.00
MULTIPLE DEPENDENT CLAIM PRESENT			260.00	0.00
*Number extra must be zero or larger		TOTAL		760.00
If applicant is a small entity under 37 C.F.R. §§ 1.9 and 1.27, then divide total fee by 2, and enter amount here.			SMALL ENTITY TOTAL	0

5. Please charge the required application filing fee of \$ 760.00 to the deposit account of **Kenyon & Kenyon**, deposit account number **11-0600**.
6. The Commissioner is hereby authorized to charge payment of the following fees associated with this communication and during the pendency of this application or credit any overpayment to the deposit account of **Kenyon & Kenyon**, deposit account number **11-0600**:
- A. Any additional filing fees required under 37 C.F.R. § 1.16;
 - B. Any additional patent application processing fees under 37 C.F.R. § 1.17;
 - C. Any additional patent issue fees under 37 C.F.R. § 1.18;
 - D. Any additional document supply fees under 37 C.F.R. § 1.19;
 - E. Any additional post-patent processing fees under 37 C.F.R. § 1.20; or
 - F. Any additional miscellaneous fees under 37 C.F.R. § 1.21.
7. A duplicate copy of this sheet is enclosed.

Dated: 3/31/89

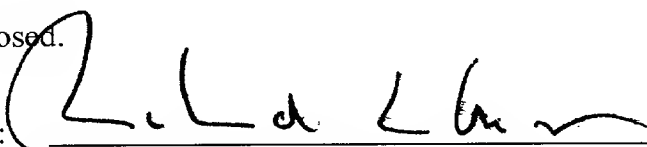By: 
Richard L. Mayer (Reg. No. 22,490)

KENYON & KENYON
One Broadway
New York, New York 10004
(212) 425-7200 (phone)
(212) 425-5288 (facsimile)

DIALYSIS MACHINE WITH A DEVICE FOR PREPARING DIALYSIS SOLUTIONS

Field of the Invention

The present invention relates to a dialysis machine with a device for preparing dialysis solutions. The present invention also relates to a connector for connecting a storage container to a medical apparatus and to a method of detecting the connection.

5

Background Information

A generic dialysis machine is disclosed in International Patent Application No. WO 92/11046, for example, which discloses a dialysis machine with a device which prepares dialysis solutions of the desired properties and feeds them into the dialysis fluid circulation of the machine. The required solutions are prepared by using tablets which contain the necessary ingredients of the dialysis solutions and are added as needed to a mixing chamber which holds water and dissolved in the water there. The tablets may be stored in a magazine arranged above the mixing apparatus, for example. A concentration curve of the ingredients of the dialysis solutions adapted to each patient's needs is achieved by adding tablets containing different quantities or types of active ingredients to the dissolving operation at predetermined times and then supplying this solution to the dialysis fluid circulation. To prevent errors in the type and concentration of dialysis solutions administered and to permit monitoring of the process, the tablets have a bar code which can be detected using a reading device on the dialysis machine. One disadvantage of this device is that numerous tablets containing different active ingredient concentrations in accordance with the width of the concentration range to be used must be produced and provided with a bar code, which makes them accordingly complicated and expensive to manufacture.

10

15

20

Furthermore, due to the solid nature of the tablets, devices for adding the tablets to a

EL169614893US

suitable solvent and for dissolving the tablets are necessary, so that the dialysis machines have a relatively complicated design.

Summary of the Invention

5 An object of the present invention is to make available a dialysis machine with which dialysis fluids of different concentrations can be reliably prepared.

 The present invention provides a dialysis machine with a dialysis solution preparation device including a detector device, at least two connections and at least two interchangeable storage containers to accommodate the solution ingredients to be
10 metered, each container being connected to at least one connector, the connectors being connectable to the connections, and the connectors or the areas of a connecting tube near the connectors having identifiers that can be detected by the detector device. This makes it possible to easily and reliably prepare dialysis solutions of different concentrations, using conventional standard solutions as the starting solutions.
15 Accordingly, this eliminates the need for preparing numerous standard solutions of different concentrations to make it possible to perform dialysis that is optimized to each patient's needs.

 According to the present invention, the connectors or the areas of a connecting tube near the connectors have identifiers that can be detected by the detector device.
20 This makes it possible to safely prevent mistakes in allocation of the storage containers to the connections of the device. The dialysis machine automatically detects the type and quantity of solution in each storage container on the basis of the identifiers which identify the storage containers, in such a way that definite identification is always possible regardless of the choice of connection.

25 The operator of the dialysis machine attaches the connectors of the required storage containers to the connections of the apparatus in any order and, via a control device, for example, inputs the desired concentrations and/or concentration gradients of the dialysis fluid to be prepared. The dialysis machine according to the present invention automatically recognizes on the basis of the identifiers which connection is
30 receiving which solutions, and it performs the desired preparation or mixing operation

accordingly through the switching of pumps or valves. It is thus possible to safely avoid confusing the connections, which could endanger the patient, or preparing dialysis solutions with unwanted ingredients or quantities. A further advantage of the device according to the present invention is derived from the fact that only a very few standard solutions are ever required to prepare even a large number of different concentrations of dialysis fluids, thus greatly simplifying the production technology and logistics.

According to a preferred embodiment of the present invention, solution bags are provided as the storage containers, comprising a connecting tube having a connector at the end. The solution bags contain standard solutions, for example, only a small number of which need be made available.

The identifiers may be provided at a predetermined position on the connector, and the detector device may be designed and/or arranged in such a way that not only the type but also the position of the identifiers can be detected. Creating the identifiers on the connector has the advantage that it rules out a mix-up of the storage containers or faulty allocation to the connections regardless of the length or number of connecting tubes. It is much less necessary for the operator to pay attention to which connector is being connected to which connection because the dialysis machine according to the present invention automatically recognizes the connector and the storage container or solvent bag connected to it. In addition, the present invention also provides for the detector device to determine the position of the connector, which makes it possible for the operator to recognize that a connector has not been fully attached to the connection. In that case, the identifiers would be displaced slightly compared with the fully attached position, which is detected by the detector device.

It is especially advantageous if the identifier includes a bar code. Such codes can be produced in large numbers and can be applied to the connectors or the connecting tubes without any problem. In addition, using a bar code not only permits detection of the type of solution connected but also permits detection of a disconnection or a faulty connection of a connector.

In another embodiment of the present invention, the bar code is arranged on

the connectors in such a way that the bars of the bar code run around the circumferential direction of the connector. This ensures that twisting of the connector cannot lead to faulty or incorrect detection by the detector device, because the bar code extends over the entire circumference. In addition, this yields the advantage that, in contrast with marks running longitudinally on the connector, the bar code can be detected completely by the detector device.

According to a preferred embodiment of the present invention, the identifier includes information on the type and volume of solution ingredients to be metered from the storage container. This means that not only is it possible to control the parameters of the active ingredients, but also to determine the time after which it may be necessary to change the storage containers. In particular, it is possible that in this case the detector device might detect and indicate to the operator too low a volume of the solution for the pending dialysis to be administered from the storage container as early as at the beginning of the treatment. This makes it possible to avoid having to interrupt the dialysis procedure because the storage containers need to be changed.

According to a preferred embodiment of the present invention, an analyzer unit is provided for connection to the detector device, said analyzer unit being designed in such a way that required values for the quantity and/or parameters of the dialysis solution ingredients accommodated in the storage containers can be stored and compared with the actual values obtained by the detector device. Before the start of the treatment, the person operating the dialysis machine enters the required data for the desired active ingredient concentrations, quantities and gradients, for example, whereupon these values are stored as the required values in the analyzer unit. Then the storage containers are connected to the connections on the device using the connectors, and the detector device determines with the help of the identifiers the type and volume, for example, of the solutions connected. Following this, a desired mixture or a profile of active ingredient concentrations over time can be established in accordance with the specifications of the operator of the machine if the analyzer unit does not detect any deviations between the specifications of the operator and the solutions actually used.

It is especially advantageous if a signaling unit or a cutoff device that can be connected to the analyzer unit are provided. For example, when a connector is improperly connected or the wrong solution ingredients are used, it is possible for a visual or acoustic signal to be delivered or for the cutoff device such as valves to be activated, thus preventing wrong or improperly connected solutions from being administered.

The cutoff device may perform a mechanical and/or electrical cutoff of lines. If the analyzer unit detects a discrepancy between the required and actual values with regard to the type or quantity of active ingredients, the cutoff device is activated in such a way that either a supply line to the dialysis machine is cut off, thus preventing dialysis solution from being delivered to the dialyzer, or it is possible for the electric power supply to the pump of the dialysis circuit, for example, not to be activatable for as long as the analyzer unit detects a lack of correspondence between the required value and the actual value.

Furthermore, the present invention concerns a connector for connecting a storage container with solution ingredients to a medical apparatus. The connector has an identifier to identify it. The identifier may include a bar code. Instead of the bar code, other identifiers also be used, permitting reliable identification of the connector or a storage container connected to it.

It is especially advantageous if the bar code is designed to run around the connector. This affords the advantage that it is not necessary to make sure of a specific rotational position when connecting the connector, because according to the present invention the bar code runs around the entire circumference of the connector. Another advantage of such a design is that, unlike marks running longitudinally on the connector, the circumferential bar code can always be detected completely and reliably by a detector device.

The present invention also concerns a method of detecting a connection of a solution ingredient storage container, where the connector is provided with an identifier and is attached to a matching component, and a reader unit determines the type and position of the connector. In that case, the identifier may comprise a bar

code. This affords the advantage that it is no longer possible to mix up the connectors and connections identified according to the present invention. In addition, this permits rapid and reliable detection of a defective connection of the connector to the matching component or of any disconnection that might occur during the dialysis operation.

Brief Description of the Drawings

Additional advantages and details of the present invention are explained in greater detail below on the basis of an embodiment illustrated in the drawing, in which:

Figure 1 shows a connector with a bar code arranged on a connecting tube to a solution bag; and

Figure 2 shows the dialysis machine with a preparation device according to the present invention.

Detailed Description

Figure 1 shows connector 10 in a sectional diagram (left) according to line A-A in the side view shown on the right in Figure 1. Connector 10 is arranged at the end of connecting tube 30, with the connecting tube 30 being connected to a solution bag containing the required solution ingredients at its other end.

Connector 10 has bar code 22 as identifier 20, with the bars of bar code 22 running circumferentially around connector 10. This ensures that, regardless of whether the connector 10 is twisted in attaching it to a connection, detection of bar code 22 by the detector device is still possible.

Bar code 22 contains, for example, information about the type and quantity of the solution held in the solution bag associated with it. After selecting the suitable solutions, the person operating the dialysis machine can attach the connectors to any connections on the dialysis machine because according to the present invention the information of identifier 20 is detected or bar code 22 is read. This method of identifying the solution bag rules out the possibility of mixing up the solutions, which

could lead to dispensing incorrectly prepared dialysis fluids. The arrangement of bar code 22 on connector 10 according to Figure 1 also makes it possible to detect whether connector 10 has been properly and completely attached to the connection on the machine. If this is not the case, the detector device will detect a bar pattern which, because of the displacement, does not correspond completely to the bar pattern detected when connector 10 is properly connected. This permits safe and reliable detection of the faulty connection or any disconnection occurring during operation.

The dialysis machine according to the present invention makes it possible to achieve a higher quality of treatment due to the fact that the dialysis solutions administered, in particular peritoneal dialysis solutions, can be prepared individually and optimized to each patient's needs. In particular, it is possible to use standard solutions, only a relatively small number of which need be provided. Increased convenience and greater safety in operation are thus achieved due to the fact that the solution bags and/or storage containers can be attached to the connections in any order, because the solution bags and their contents can be identified automatically and unambiguously by the device according to the present invention.

Fig. 2 shows a dialysis machine having a preparation device 1 for preparing a dialysis solution from a first solution bag 2 and a second solution bag 3. The preparation device 1 has a first connection 6 and a second connection 7, although more connections can be provided. The first solution bag has a connecting tube 30 and a connector 10 with a bar code 22. Alternatively, bar code 22 could be placed on connecting tube 30. The second bag 3 is connected by second connecting tube 31 and connector 11 to second connection 7. The preparation device 1 includes a detector device 5 having bar code readers 15 and 16 and control device 25, for example a microprocessor. The control device 25 can control the flow of the solution of solution bag 2 through a valve or flow meter 35 and the flow of the solution of solution bag 3 through valve or flow meter 36 to a mixing chamber 37. An analyzer unit 55 connectable to the detection device 5 is also provided for analyzing the dialysis solution and controlling a cutoff device 45.

69760, 66720

WHAT IS CLAIMED IS:

1. A dialysis machine comprising:
a preparation device for preparing dialysis solutions, the preparation device including a detector device, a first connection and a second connection, first and second interchangeable storage containers for solution ingredients, and a first connector for connecting the first storage container to the first connection and a second connector for connecting the second storage container to the second connection, the first connector or a connecting tube of the first storage container having an identifier detectable by the detector device.
2. The dialysis machine as recited in claim 1 wherein the first storage container is a solution bag, the solution bag including the connecting tube, the first connector being provided at an end of the connecting tube.
3. The dialysis machine as recited in claim 1 wherein the identifier is provided at a predetermined position on the first connector, and the detector device is capable of detecting the type and the position of the identifier.
4. The dialysis machine as recited in claim 1 wherein the identifier includes a bar code.
5. The dialysis machine as recited in claim 4 wherein the bar code is arranged on the first connector so that bars of the bar code run circumferentially around the connector.
6. The dialysis machine as recited in claim 1 wherein the identifier includes information on a type and volume of the solution ingredients from the storage container.

7. The dialysis machine as recited in claim 1 further comprising an analyzer unit connectable to the detector device, the analyzer unit capable of comparing required values for quantities of the dialysis solution ingredients with actual values determined by the detector device.

8. The dialysis machine as recited in claim 7 further comprising a signaling unit or cutoff device connectable to the analyzer unit.

9. The dialysis machine as recited in claim 8 wherein the cutoff device operates mechanically and/or electrically.

10. A connector for connecting a storage container with solution ingredients to a dialysis machine, the connector comprising:
an identifier for identifying the storage container.

11. The connector as recited in claim 10 wherein the identifier includes a bar code.

12. The connector as recited in claim 11 wherein the bar code runs circumferentially.

13. A method of detecting connection of a solution ingredient storage container comprising the steps of:
providing a connector with an identifier;
connecting the connector to a matching connection, and
reading the identifier so as to determine a type and a position of the connector.

14. The method as recited in claim 13 wherein the identifier includes a bar code.

15. A method of providing a dialysis solution comprising the steps of:
providing a connector with an identifier;
connecting the connector to a solution bag at one end and a mixing chamber at another end;
reading the identifier; and
analyzing a mixture at an output of the mixing chamber so as to compare at least one mixture value to at least one predetermined value.

16. The method as recited in claim 15 further comprising providing a second connector with a second identifier and connecting the second connector to the second solution bag at one end and to the mixing chamber at another end.

17. The method as recited in claim 15 wherein the reading step results in at least one solution value, the at least one predetermined value being a function of the at least one solution value.


18. The method as recited in claim 15 further comprising stopping flow from mixing chamber if the at least one mixture value does not correspond to the at least one predetermined value.

19. The method as recited in claim 15 further comprising controlling solution flow to the mixing chamber as a function of the at least one mixture value.

Abstract of the Disclosure

The present invention relates to a dialysis machine with a device for preparing dialysis solutions. Simple and reliable preparation of dialysis fluids of different concentrations is achieved by the fact that the device has a detector device, at least two connections and at least two interchangeable storage containers to hold the solution ingredients to be metered, each being connected to at least one connector, and with the connectors being connectable to the connections, and with the connectors or the areas of a connecting tube near the connectors having identification means which can be detected by the detector device. The present invention also relates to a connector for connecting a storage container with solution ingredients to a medical apparatus, where the connector or areas of a connecting tube near the connector has identification means. The present invention also relates to a method of detecting a connection of a solution ingredient storage container. A simple and reliable implementation of the method is guaranteed by the fact that the connector is provided with identification means and is attached to a matching component, and a reader unit determines the type and position of the connector.

Fig. 1

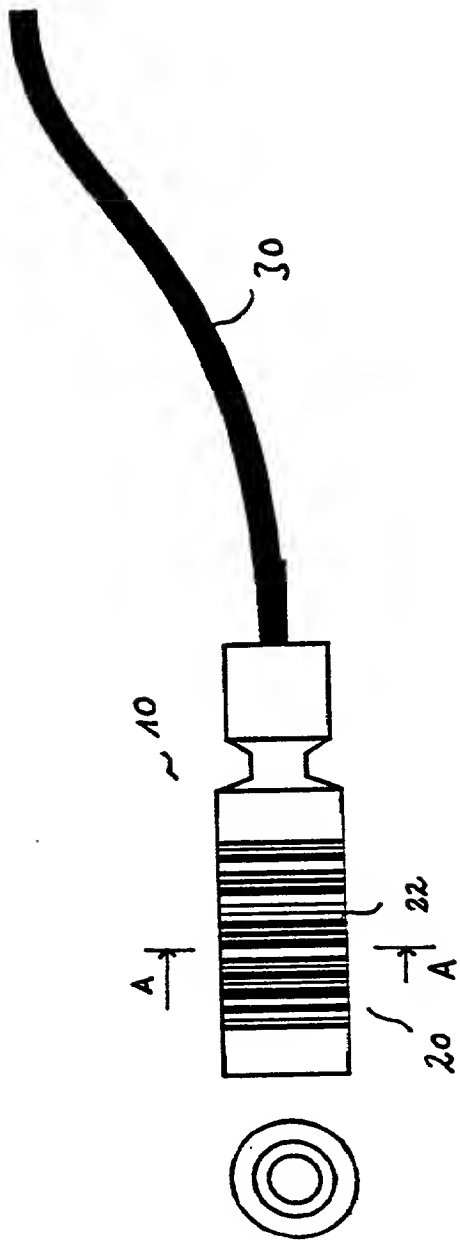

Sent by: KENYON&KENYON

2124255288;

03/09/99 11:11AM; JetFax #608; Page 8/8

	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

